


LED High Bay

190
LM/W





Features:

- Patented design
- System efficiency 190lm/W(170lm/W,150lm/W)
- Meanwell/Philips/Sosen Driver for option, PF>0.95
- Lumileds/Epistar 2835 SMD LED , CRI > 70/80
- ADC12 aluminum die casting housing , perfect heat dissipation
- Available with 60°/ 90°/120° beam angle
- 3000K / 4000K / 5000K / 5700K / 6500K CCT
- Long life span , L70 > 50,000 Hours


Controls and Dimming:

- ▶ DALI Control
- ▶ 1-10V Dimming
- ▶ PIR Sensor
- ▶ Motion Sensor
- ▶ Emergency Module
- ▶ Zigbee Wireless Control


Model NO.	BB-GKD-100W-E8	BB-GKD-150W-E8	BB-GKD-200W-E8
Wattage	100W	150W	200W
Luminous Efficiency	190lm/W(170lm/W,150lm/W)		
Total Lumen	19,000lm	28,500lm	38,000lm
Beam Angle	60° /90°/120°/reflector 90°		
Driver	Meanwell/Philips/Sosen		
PF	> 0.95		
Dimming	0-10V/DALI/PWM		
LED	Lumileds/Epistar 2835 SMD		
LED Qty	240PCS	360PCS	480PCS
CCT	3000K/4000K/5000K/5700K/6500K		
CRI	70,80		
Input Voltage	AC200-240V 50/60Hz		
IP Rating	IP65		
IK Rating	IK09		
Life span	>50,000hours		
Carton Size (mm)	L280mm x W280mm x H160mm	L330mm x W330mm x H160mm	L370mm x W370mm x H160mm
QTY./CTN.	1 PCS/CTN	1 PCS/CTN	1 PCS/CTN
Net Weight	1.9Kg	2.3Kg	2.9Kg
Gross Weight	2.3Kg	3Kg	3.7Kg
Certificate	CE,CB,SAA,C-tick,ROHS		




Distribution Curve:

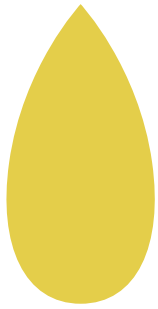

60°

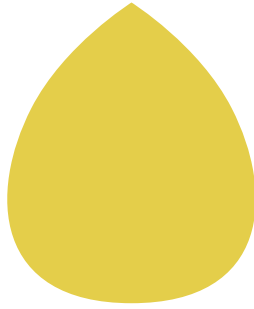


90°




120°


Technical Drawing:



100W

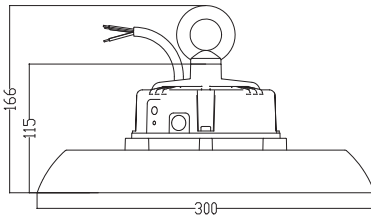

120W/150W

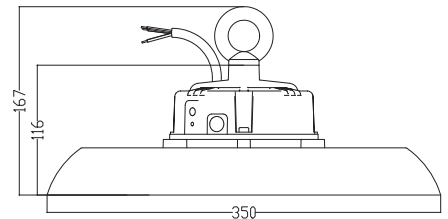

200W